


Mid-West[®] Instrument

“Piston Type” Differential Pressure Gauge & Switch Model 122



A low cost differential pressure gauge for use in measuring the pressure drop across filters, strainers, separators, valves, pumps, chillers, etc., and for local flow indication and control.

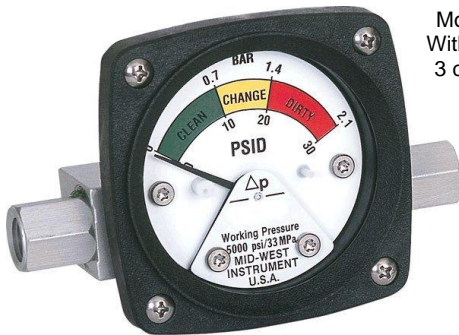

Model 122
With Special
3 color dial

- Simple, rugged, compact design.
- Working pressure up to 3,000 PSIG (200 bar)
- Over-range protection to maximum pressure.
- Body material: Aluminum with 316 stainless steel internals.
- Weather-resistant construction standard.
- Shatter resistant acrylic lens.
- Variety of Dial type and Sizes: 2-1/2", 3-1/2", 4-1/2" & 6"
- Available DP Ranges: Inches H₂O, PSID, bar, and Kpa
- 1/4" FNPT End Process Connections
- Panel Mountable, Wall mount available as option
- Temperature Limits: -40°F(-40°C) to +200°F(+93°C)

Due to precision sizing of piston and body bore, leakage across piston will not exceed 32 SCFH air at 100 PSID at ambient temperature.



Model 122 0-30 PSID
2-1/2" Dial w/Maximum
Follower Pointer



Model 122
0-50 PSID
4-1/2" Dial



Model 122
0-15 PSID

An optional maximum indication follower pointer provides automatic indication of maximum differential occurring during a time period or system cycle. Reversed pressure ports are optionally available to facilitate installation and readability depending on which side of a filter, etc., the instrument must be installed.


Model	Body Material	Accuracy	Min. ΔP Range	Max. ΔP Range	MWP PSIG (Bar)	Switch Options
122	Aluminum	±5%	0-5 PSID (0-0.35 bar)	0-110 PSID (0-7 bar)	3,000 (200)	1 & 2 switch Hermetically Sealed

Proof Pressure: Two times rated working pressure at ambient temperature

Standards: Model 122 gauge either conforms to and/or is designed to the requirements of the following standards:

ASME B1.20.1	NACE MR0175
ASME B40.100	NEMA Std. No. 250
CSA-C22.2 No. 14.25 and 30	SAE J514
EN-61010-1	UL Std. No. 50,508 and 1203

“Piston Type” Differential Pressure Gauge Switch Option Model 122

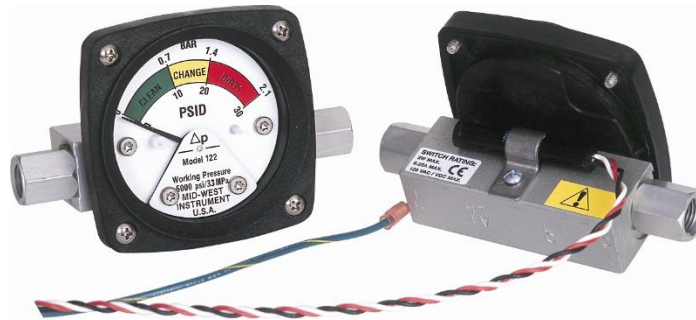

Model 122 Gauge with switches have one or two Single Pole Single Throw (SPST) or Single Pole Double Throw (SPDT) reed switches with the resistive ratings specified in the table below. Standard and weatherproof units are CE/UKCA marked for conformance with the Low Voltage Directive to harmonized standard EN 61010-1.

A provision to connect a protective conductor terminal is provided on the Low port end of the gauge body. A 6-32 screw, 18 Awg, green/yellow wire, and a #6 terminal is provided.

Note: Switches can be set below the defined minimum set point however the switch may not remain activated at maximum PSID. If the unit is set below the defined minimum set point, the customer should verify that the switch remains activated from the set point to over range of the gauge.

Provide standard protection techniques for the switch contacts for capacitive and inductive loads. Use current limiting techniques near the switch to protect the contacts due to high inrush (i.e.; in line resistor or inductor) for long cable interfaces. Provide clamping devices at or near inductive loads (i.e.; relay).

Maximum wire length between the 3W switch and its load should not exceed 70 – 100 feet or 120 VAC applications. Contact the factory for assistance regarding this condition.

WARNING:

Electrical connections should be performed by qualified personnel and meet representative national electrical code.

WARNING:

Failure to connect to the protective conductor terminal may result in a shock hazard.



Temperature Limits:

-40°F (-40°C) to +200°F (+93°C)
These limits are based on the entire instrument being saturated to these temperatures. System (process) temperatures may exceed these limitations

REED SWITCH RATINGS (Resistive Load)

Type	SPDT	SPST NO	SPDT
Option	A	E	H
Power	3 W	60 W	60 W
Max Current	0.25 Amps	3.0 Amps	1.0 Amps
Max Voltage VAC/VDC	125	240	240
Setting Full Scale	10-100%	25-100%	25-100%
Hysteresis (Max / Norm)	10% / 5% (FS)	15% / 8% (FS)	25% / 13% (FS)
Repeatability	1% F.S.	1% F.S.	1% F.S.
Leads 22 Awg	(3) 24"	(2) 24"	(3) 24"

Mid-West[®] Instrument

Standard Dial Ranges: Model 120, 122, 123, 124

Range Type			
PSID	Kpa	Bar	Dual Scale
0-5 PSID	0-35 Kpa	0-1.0 Bar	0-5 PSID & 0-0.35 Kg/Cm2
0-10 PSID	0-70 Kpa	0-1.6 Bar	0-5 PSID & 0-35 KPA
0-15 PSID	0-100 Kpa	0-1.75 Bar	0-10 PSID & 0-0.7 BAR
0-20 PSID	0-160 Kpa	0-2.0 Bar	0-10 PSID & 0-0.7 KG/CM2
0-25 PSID	0-250 kpa	0-2.5 Bar	0-10 PSID & 0-70 KPA
0-30 PSID	0-400 Kpa	0.4.0 Bar	0-100 PSID & 0-7 BAR
0-50 PSID	0-600 Kpa	0-6.0 Bar	0-100 PSID & 0-7 KG/CM2
0-60 PSID	0-700 Kpa	0-7.0 Bar	0-100 PSID & 0-700 KPA
0-75 PSID			0-15 PSID & 0-1 BAR
0-100 PSID			0-15 PSID & 0-1 KG/CM2
0-110 PSID			0-15 PSID & 0-100 KPA
**0-150 PSID			0-20 PSID & 0-1.4 BAR
**0-200 PSID			0-20 PSID & 0-140 KPA
**0-250 PSID			0-25 PSID & 0-1.75 BAR
**0-300 PSID			0-25 PSID & 0-1.75 KG/CM2
**0-400 PSID			0-25 PSID & 0-175 KPA
Bi-Directional	Bi-Directional	Bi-Directional	0-30 PSID & 0-2 BAR
5-0-5 PSID	40-0-40 Kpa	0.4-0-0.4 Bar	0-30 PSID & 0-2 KG/CM2
10-0-10 PSID	60-0-60 Kpa	0.6-0-0.6 Bar	0-30 PSID & 0-200 KPA
15-0-15 PSID	100-0-100 Kpa	1-0-1 Bar	0-50 PSID & 0-3.5 BAR
20-0-20 PSID	160-0-160 Kpa	1.6-0-1.6 Bar	0-50 PSID & 0-3.5 KG/CM2
25-0-25 PSID	250-0-250 Kpa	2.5-0-2.5 Bar	0-50 PSID & 0-350 KPA
30-0-30 PSID	400-0-400 Kpa	4-0-4 Bar	0-75 PSID & 0-500 KPA
50-0-50 PSID	600-600 Kpa	6-0-6 Bar	
60-0-60 PSID			
100-0-100 PSID			

The above mentioned ranges are some of the most popular requested today. Mid-West Instrument can provide special un-cataloged dial range requirements. As well as multiple scale dials, multiple color dials and special decals. Please consult factory for complete information.

Model	Min. ΔP Range	Max. ΔP Range
120	0-5 PSID	0-110 PSID (0-7 bar)
122	0-5 PSID	0-100 PSID (0-7 bar)
**123	0-150 PSID (0-10 bar)	0-400 PSID (0-27.0 bar)
**124	0-5 PSID (0-0.35 bar) 0-150 PSID (0-10 bar)	0-110 PSID (0-7 bar) 0-400 PSID (0-27.0 bar)

Proof Pressure: Two times rated working pressure at ambient temperature

Temperature Limits: -40°F(-40°C) to +200°F(+93°C)

Transmitter Option: -20°F(-28°C) to +150°F(+65°C)

These limits are based on the entire instrument being saturated to these temperatures. System (process) temperatures may exceed these limitations with proper installation. Contact our customer service representative for details.

Standards: Model 120 -124 Series gauges either conform to and/or are designed to the requirements of the following standards:

ASME B1.20.1

ASME B40.100

CSA-C22.2 No. 14.25 and 30

EN-61010-1

NACE MR0175

NEMA Std. No. 250

SAE J514


UL Std. No. 50,508 and 1203

Standard Model Number Sequence: 122AA-02-00

3000 PSIG Working Pressure, Aluminum Body, Stainless Steel Piston, Ceramic Magnet,
Buna-N Seals, 1/4" FNPT End Connections, 2-1/2" Round Dial,
Engineered Plastic Dial Case with Shatter Resistant Acrylic Lens
Accuracy ±5% Full Scale (Ascending)

Range: 0-5 PSID to 0-100 PSID (0-.35 bar to 0-7.0 bar)

Gauge Body and Internal components are considered wetted parts.

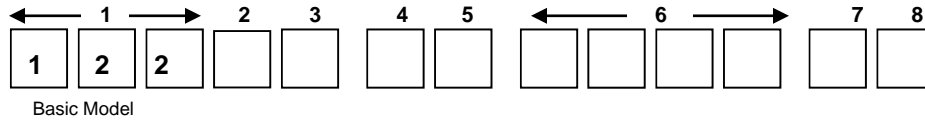

Range: _____



2	Material
A	Aluminum Body / Stainless Steel Piston
Z	Special (<i>Un-coded Options</i>)
3	Dial Size & Type
A	2-1/2" Round Dial w/Engineered Plastic Dial Case
C	4-1/2" Round Dial w/Engineered Plastic Dial Case
E	3-1/2" Round Dial w/Anodized Aluminum Dial Case
G	4-1/2" Round Dial w/Anodized Aluminum Dial Case
J	6" Round Dial w/Engineered Plastic Dial Case
T	Non-Indicating DP Switch Only
Z	Special (<i>Un-coded Options</i>)
4	Seal Materials
0	Buna-N (<i>Standard</i>)
1	Viton®-A Registered Trademark of Dupont
2	Neoprene
4	Teflon®-A Registered Trademark of Dupont
5	Ethylene Propylene
9	Special (<i>Un-coded Options</i>)
5	Process Connections
2	1/4" FNPT End Connections (<i>Standard</i>)
9	Special (<i>Un-coded Options</i>)

Model 122 - continued



6 Additional Options	
O	None
A	Reversed High / Low Process Connections.
E	Two (2) 1/4-20 Mounting Holes
L	Liquid Fill <i>(Glycerin Fill Standard) (1) (Not available with shatterproof glass lens)</i>
M	Maximum Indicator Follower Pointer <i>(Not available w/3-1/2", 6" Dial or Liquid fill options) (Not available w/shatter proof glass lens)</i>
S	Shatter Proof Glass Lens <i>(4-1/2" available with "G" option Aluminum Dial Case only) (Not available with liquid fill option)</i>
T	Oxygen Cleaning
U	Stainless Steel Tag with S.S. Wire
V	Stainless Steel Tag and S.S. Screw
W	Wall Mount Kit
Z	Special (Un-coded Options)
<i>(1) Silicone Fill available please contact factory</i>	
<i>Note: Not All Options Available in Combination with other Options</i>	
7 Electrical Configurations (All options CE/UKCA Marked & ROHS Compliant)	
O	None
M	One (1) Reed Switch (Clamp-On)
N	Two (2) Reed Switches (Clamp-On)
Z	Special (Un-Coded Options)
<i>Note: M & N Options have 22 AWG leads - 24" Lengths</i>	
8 Electrical Specifications (For Resistive Loads)	
O	None
A	SPDT 3W, 0.25 Amp, 125 VAC/VDC <i>(Switch adjustable range of 10-100%)</i>
E	SPST 60W, 3.0 Amp, 240 VAC/VDC <i>(Normally Open) (Switch adjustable range of 25-100%)</i>
H	SPDT 60W, 1.0 Amp, 240 VAC/VDC <i>(Switch adjustable range of 25-100%)</i>
Z	Special (Un-Coded Options)

Factory preset switches at no charge (Specify Setting)

MID-WEST INSTRUMENT has been serving a variety of industries (Power, Chemical, Petro-Chemical, HVAC, Water Filtration etc...) for over 50 years. Over 700,000 piston type units have been produced bearing the Mid-West name or private branded for our OEM customers!

Mid-West understands that in today's demanding environment, flexibility, quick response time and the ability to ship most of our product line in 2 weeks or less is essential to our customers. Standard configurations can be customized and modified to suit our customer's needs for ease of installation or retrofit.



Engineering &
Industrial
Instrumentation

CMC TECHNOLOGIES

PTY LIMITED ACN: 085 991 224, ABN: 47 085 991 224

Phone: +61 2 9569 4000
Fax: +61 2 9569 4111
Email: sales@cmctechnologies.com.au
Web Site: <http://www.cmctechnologies.net.au>

Unit 19, 77 Bourke Road,
Alexandria, NSW, 2015
AUSTRALIA