Compact spark extinguishing system FLA4-1 for mobile dust extractors

Prefabricated extinguishing system for self-assembly

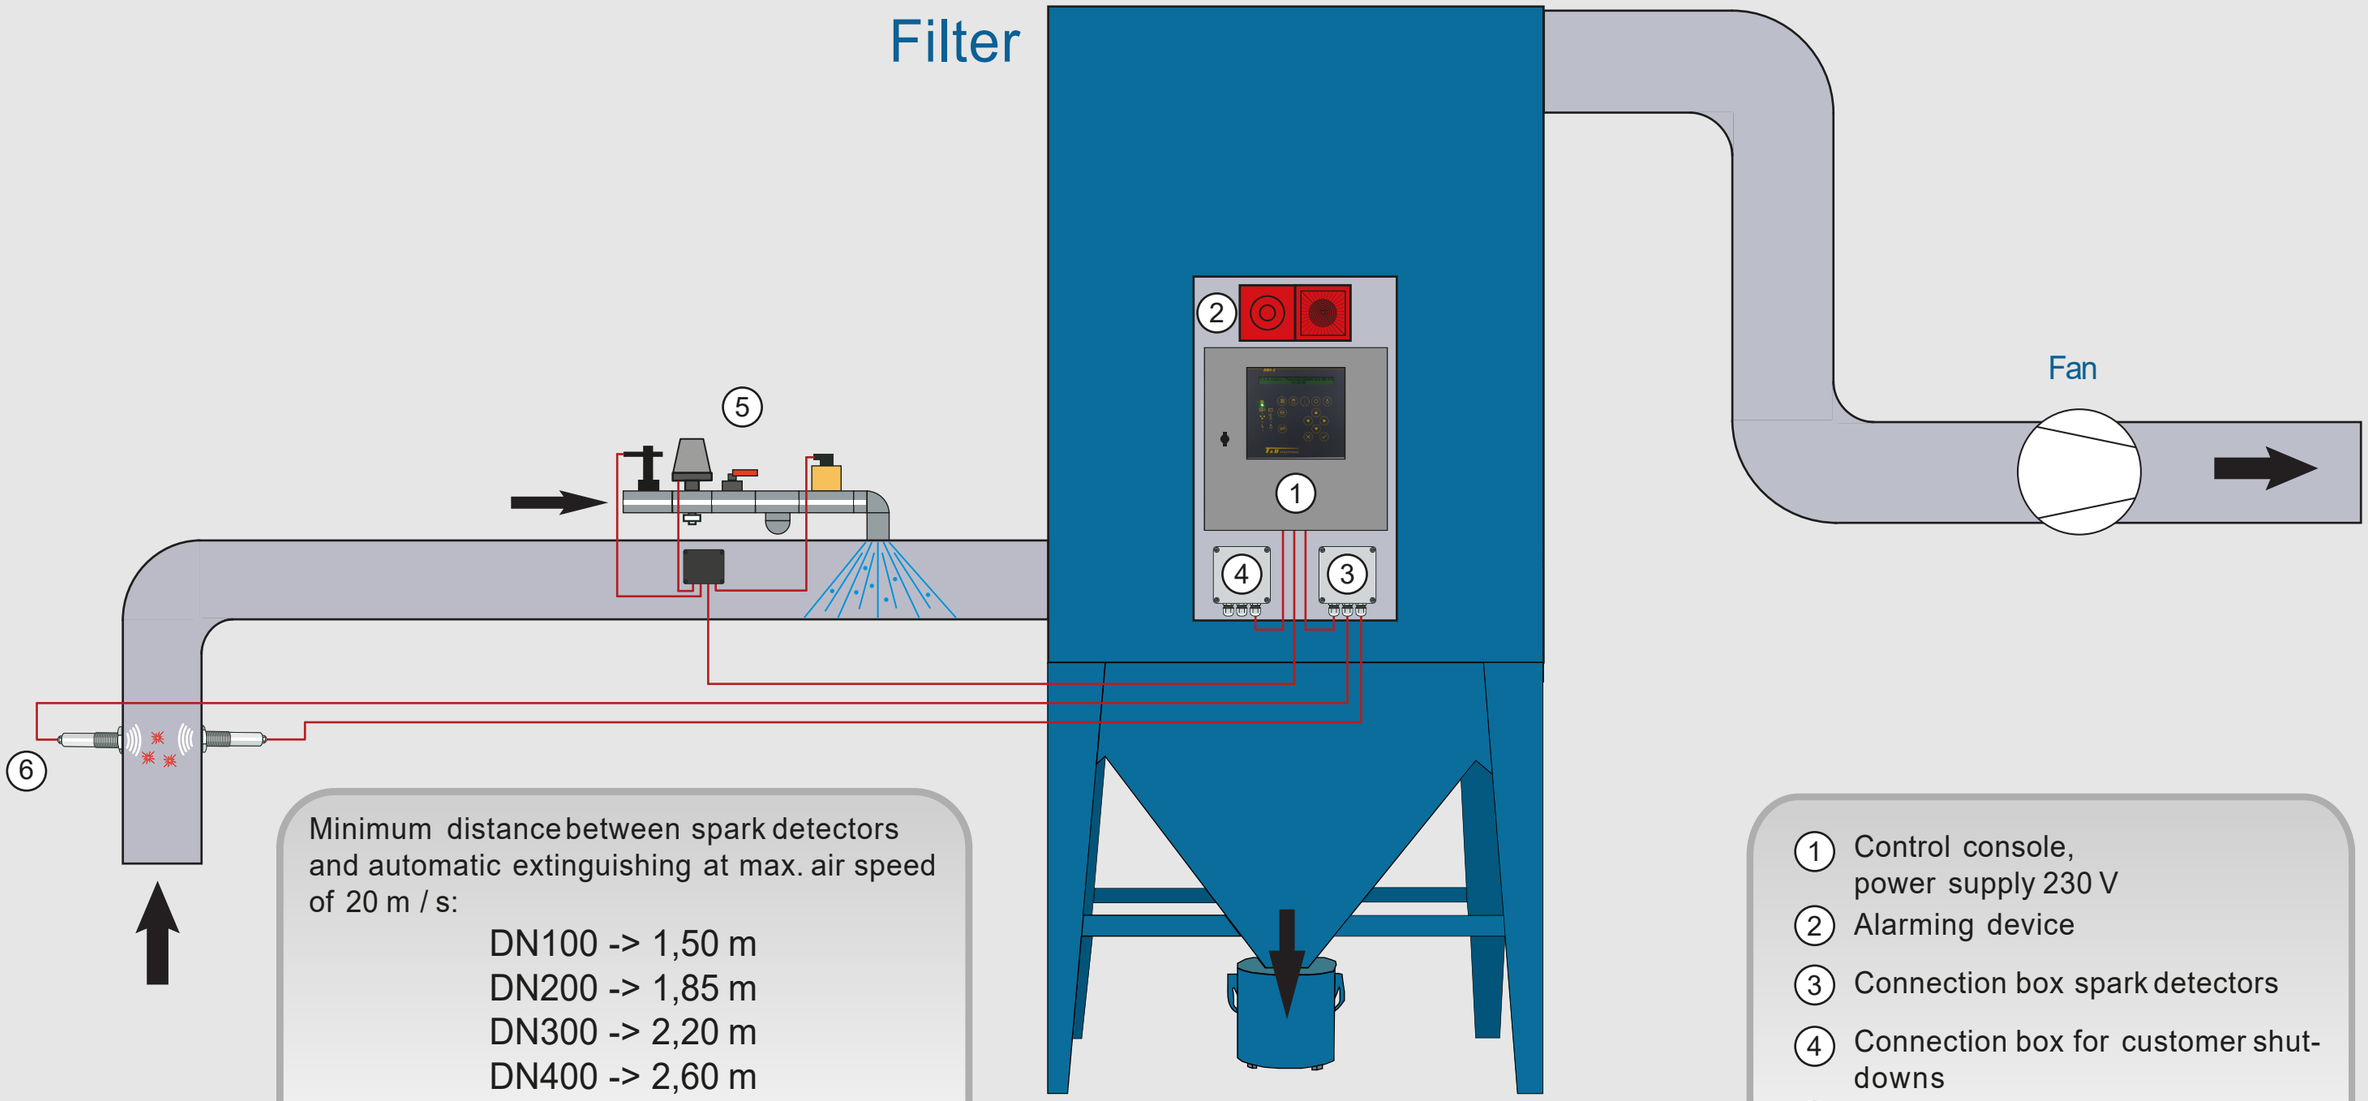

Minimum distance between spark detectors and automatic extinguishing at max. air speed of 20 m / s:

DN100 -> 1,50 m
DN200 -> 1,85 m
DN300 -> 2,20 m
DN400 -> 2,60 m

Distances for further air speeds on request.

1. Control console, power supply 230 V
2. Alarming device
3. Connection box spark detectors
4. Connection box for customer shut-downs
5. Automatic extinguishing, infeed 3 bar, 60 l / min, DN25
6. Spark detectors, cable length 10

T&B electronic
WE HAVE THE RIGHT SOLUTIONS FOR ALL APPLICATIONS.

CMC TECHNOLOGIES
PTY LIMITED ACN: 085 991 224, ABN: 47 085 991 224
Engineering & Industrial Instrumentation
Phone: +61 2 9669 4000
Fax: +61 2 9669 4111
Email: sales@cmctechnologies.com.au
Web Site: http://www.cmctechnologies.net.au
Unit 19, 77 Bourke Road, Alexandria, NSW, 2015 AUSTRALIA