


# Explosion Vent GE

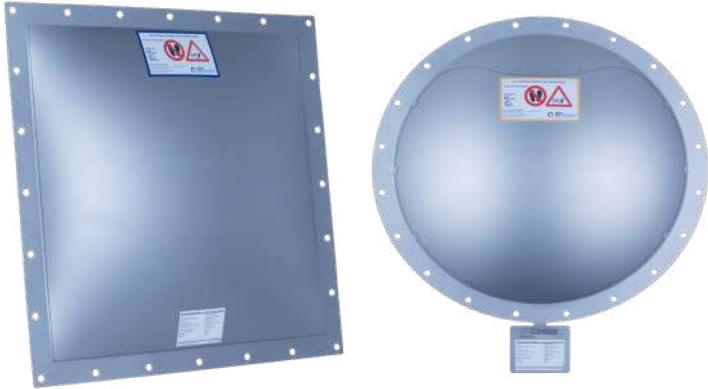

Filter installations with pneumatic cleaning systems and a very high vacuum operation require an explosion vent that withstands vacuum and positive pressure cycling for a long time. For such requirements the GE is the best choice. Its domed design enables negative pressure resistance without the need for an extra vacuum support. The GE type vents feature pressure peak damping as well as integrated flange gaskets.

## GE Round

Millimeters			Inches	
DN	Inside Diam	Outside Diam	Inside Diam	Outside Diam
200	208	268	8.19	10.55
250	261	341	10.28	13.43
300	310	390	12.20	15.35
350	342	422	13.46	16.61
400	393	473	15.47	18.62
450	465	545	18.31	21.46
500	494	574	19.45	22.60
600	596	676	23.46	26.61
24"	610	705	24	27.76
700	696	776	27.40	30.55
750	762	842	30	33.15
30"	768	870	30.25	34.25
800	797	877	31.38	34.53
900	894	974	35.20	38.35
36"	914	1009	36	39.72
1000	995	1075	39.17	42.32
1100	1124	1214	44.25	47.80

**\*\*Chart details standard size vents. Contact IEP for any custom requirements\*\***

# GE Rectangular

Millimeters				Inches			
Inside		Outside		Inside		Outside	
Length	Width	Length	Width	Length	Width	Length	Width
229	229	309	309	9.02	9.02	12.17	12.17
205	290	285	370	8.07	11.42	11.22	14.57
229	305	309	385	9.02	12.01	12.17	15.16
150	600	230	680	5.91	23.62	9.06	26.77
200	460	280	540	7.87	18.11	11.02	21.26
220	420	300	500	8.66	16.54	11.81	19.69
340	385	400	445	13.39	15.16	15.75	17.52
305	457	381	534	12	18	15	21
247	610	327	690	9.72	24.02	12.87	27.17
340	440	400	500	13.39	17.32	15.75	19.69
410	410	490	490	16.14	16.14	19.29	19.29
305	610	381	686	12	24	15	27
300	620	380	700	11.81	24.41	14.96	27.56
320	640	380	700	12.60	25.20	14.96	27.56
490	490	570	570	19.29	19.29	22.44	22.44
375	655	455	735	14.76	25.79	17.91	28.94
470	610	550	690	18.50	24.02	21.65	27.17
490	590	570	670	19.29	23.23	22.44	26.38
525	668	645	788	20.67	26.30	25.39	31.02
610	610	686	686	24	24	27	27
457	890	534	965	18	35	21	38
620	670	680	730	24.41	26.38	26.77	28.74
645	645	735	735	25.39	25.39	28.94	28.94
653	653	733	733	25.71	25.71	28.86	28.86
630	730	710	810	24.80	28.74	27.95	31.89
520	1020	600	1100	20.47	40.16	23.62	43.31
586	920	666	1000	23.07	36.22	26.22	39.37
500	1100	580	1180	19.69	43.31	22.83	46.46
610	915	686	991	24	36	27	39
750	750	830	830	29.53	29.53	32.68	32.68
750	840	830	920	29.53	33.07	32.68	36.22
801	801	880	880	31.54	31.54	34.65	34.65
610	1118	690	1198	24.02	44.02	27.17	47.17
610	1219	686	1295	24	48	27	51
645	1130	725	1210	25.39	44.49	28.54	47.64
720	1020	800	1100	28.35	40.16	31.50	43.31
915	915	991	991	36	36	39	39
920	920	1000	1000	36.22	36.22	39.37	39.37
915	1118	991	1194	36	44	39	47
1020	1020	1100	1100	40.16	40.16	43.31	43.31
1118	1118	1194	1194	44	44	47	47
1130	1130	1220	1220	44.49	44.49	48	48

\*\*Chart details standard size vents. Contact IEP for any custom requirements\*\*



**CMC TECHNOLOGIES**

PTY LIMITED ACN: 085 991 224, ABN: 47 085 991 224

Engineering &  
Industrial  
Instrumentation

Phone: +61 2 9669 4000  
Fax: +61 2 9669 4111  
Email: [sales@cmctechnologies.com.au](mailto:sales@cmctechnologies.com.au)  
Web Site: <http://www.cmctechnologies.net.au>

Unit 15, 77 Bourke Road,  
Alexandria, NSW, 2015  
AUSTRALIA